


Product Name : Double Faced Tape #5748

•SEKISUI DOUBLE FACED TAPE #5748 is developed for permanent use and has high reliability. It is adherable widely, such as to resin plate. It has high endurance.

1. Structure

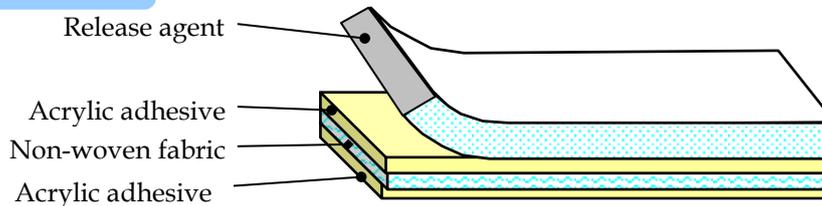

2. Use

Suitable for punching process and applying to resin name plate.

3. Futures

- (1) It has excellent repulsion ability that prevents from lifting up when adhering on the uneven surfaces.
- (2) It performs high adhesion ability to difficult-to-adhere materials, such as PP Plate, etc.
- (3) It has long term reliability resistance to heat and weather.
- (4) It is suitable for punching process.

4. Standard Size

Table 1 Standard Size

Item	Unit	Standard Size
Tape thickness	μm	120
Adhesive thickness	μm	105
Width	mm	1050 1370
Length	m	50 60

5. General characteristic

Table 2 General adhesion properties

Items	Unit	Measurement value	Examination Method
Adhesion (to SUS plate)	N25/mm	18.3	Based on JIS Z 0237
Holding power	mm	0.2	Sekisui method

※The figures above are based on Sekisui measurements and not guaranteed values.

6. Cautions in use

- 1) Please remove dirt, water, oil and other contaminants from the substrate's surface before use.
- 2) Please avoid re-application, and leave it for several hours after application
- 3) Please avoid direct application on uneven or coarse surfaces and the human body.
- 4) Please avoid storage in places with high temperatures, high humidity, and direct sunlight.
- 5) Please do tests on first-time adherends. If in doubt about its use, please contact us.
- 6) The warranty period of products is 6 months after delivery date.

The specs and appearances may be changed without notice. Customer has responsibility to judge if the tape can be used for the application. In the case of defective tape, liability will be limited to replace the defective tape.